



FMS-W25-ASCB
WATER ABSORBENT FILTER




SUSTAINABLE HIGH- FILTRATION PERFORMANCE


FILTER MORE, WASTE LESS.



95 %
FILTRATION
EFFICIENCY

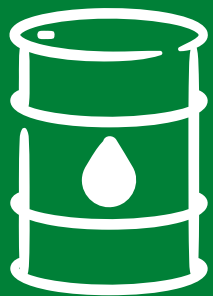

>80%
REDUCE OIL
WASTE

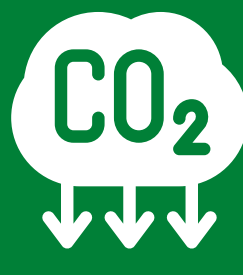

>80%
LOWER CO2
EMISSIONS

*Compared to the previous generation with -0%.


TECHNICAL SPECIFICATIONS OF THE ELEMENT

FMS-W25-ASCB

Efficiency	95%
WHC	1000 ML
Recommended flow	25 GPM
Maximum pressure	100 PSI
Housing	BOWL FMS-25-BW



WATER SATURATION CURVE DELTA P VS INJECTED WATER RELATIONSHIP

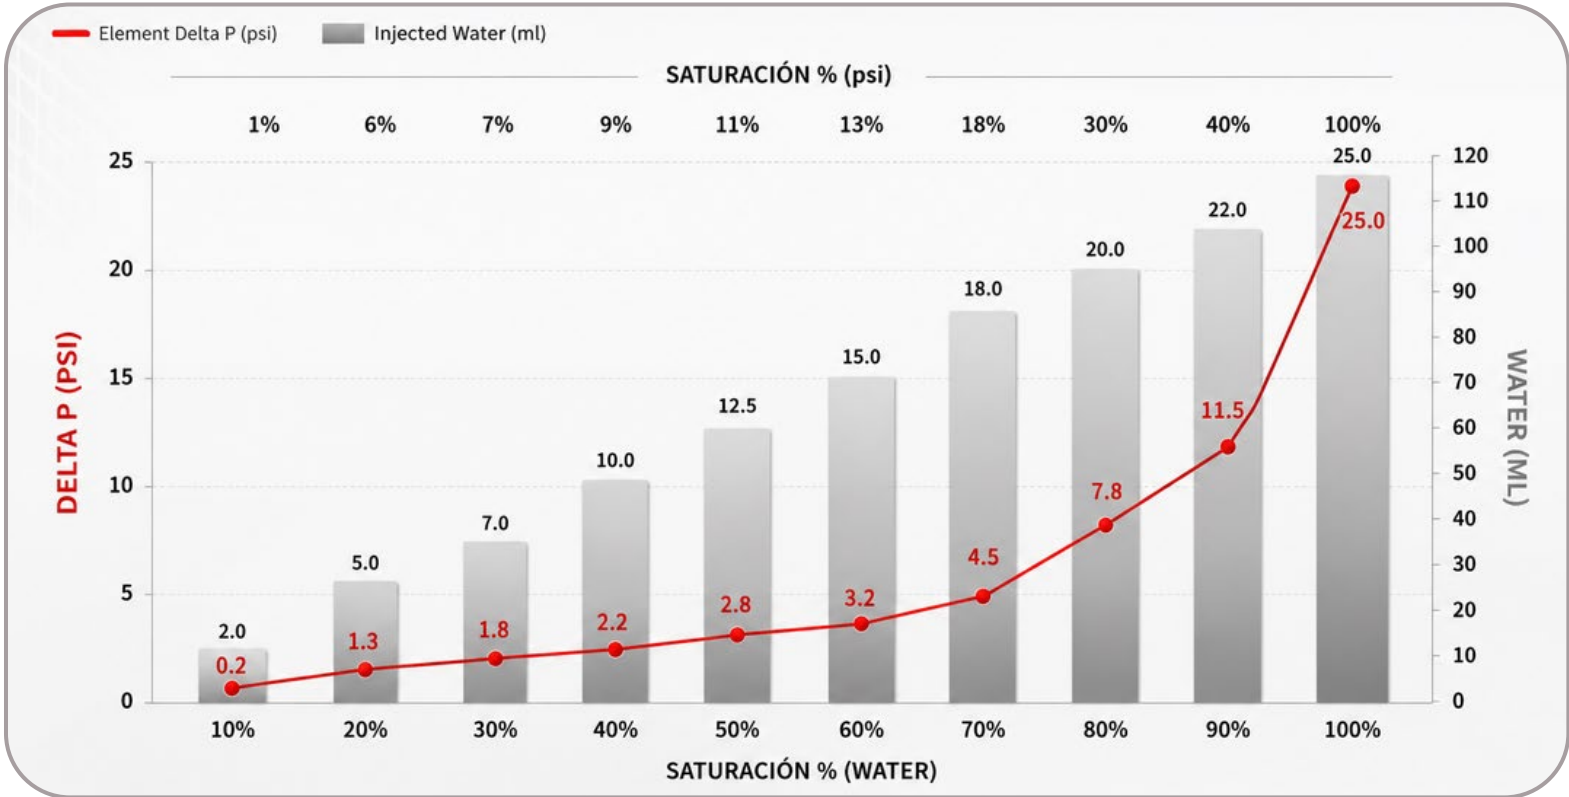

Water and emulsions negatively impact the performance of fuels and oils, causing corrosion, oxidation, and reduced performance. Our absorbent materials help keep fluids moisture-free, protecting hydraulic equipment, lubrication systems, and critical diesel applications.

DOBLEMENTE
VERDES



SCAN TO VISIT OUR WEBSITE



FMS INTERNATIONAL INC.

580 W PARK RD LEETSDALE
PA 15056
USA

+1724 340 4210
info@fms-filtration.com
fms-filtration.com