



FMS-1/25-P
POINT OF USE FUEL FILTER

FMS-W25-A
WATER ABSORBING FUEL FILTER

100% SYNTHETIC MEDIA

ULTRA CLEAN DELIVERY

DIRT REMOVAL



WATER ABSORBING

THETA 4>4310 SINGLE PASS TEST

	ISO CODES	PARTICLES		
		4 μm	6 μm	14 μm
Reservoir Contaminant Level	22/21/18	31898	14071	542
Average Cleanliness at Downstream	10/8/6	7.4	1.7	0.34



ELEMENT TECHNICAL SPECIFICATIONS

FMS-1/25-P

Efficiency	Beta 4>4193 (ISO 16889:99)
DHC	155 grams (MTD)
Max. Flow	50 gpm
Recommended Flow	25 gpm
Dimensions	10x5x5"
Weight	ND lbs
Housings	FMS-25-BP

FMS-W25-A

Efficiency	95%
WHC	1000 ml
Max. Flow	40 gpm
Recommended Flow	25 gpm
Dimensions	10x5x5"
Weight	ND lbs
Housings	FMS-25-BP

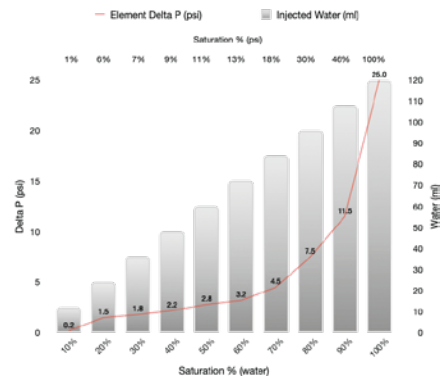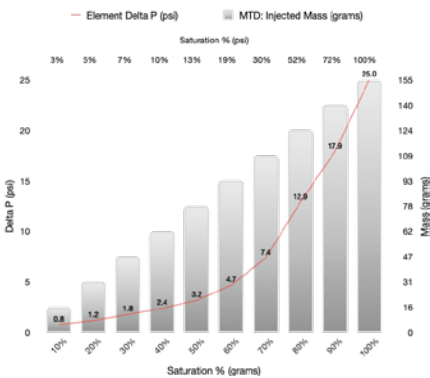

Contamination control at dispatch is a fundamental part of best practice. Our bottom-connected lockbox filters are the only ones that can be installed on the ridge of subway tanks and handle multiple dispensing guns.

Water and emulsions cause up to 15% of power loss, thus up to 15% increase in fuel consumption. All ISO 4406 contamination control plans must contemplate water and emulsions with SAE J1488 certified systems.



SCAN TO VISIT OUR WEBSITE



FMS INTERNATIONAL INC.

580 W Park Rd Leetsdale,
PA 15056
USA

+1 724 340 4210
info@fms-filtration.com
fms-filtration.com