



FMS-1/25-PSCB
FUEL FILTER

FMS-W25-ASCB
WATER ABSORBENT FILTER



SUSTAINABLE HIGH- FILTRATION PERFORMANCE

FILTER MORE, WASTE LESS.




99.9%
FILTRATION
EFFICIENCY
(ISO 16889)



>90%
LESS
METAL
WASTE



>80%
REDUCE OIL
WASTE




>80%
LOWER CO2
EMISSIONS

*Compared to the previous generation with -0%.


TECHNICAL SPECIFICATIONS OF THE ELEMENT

FMS-1/25-PSCB

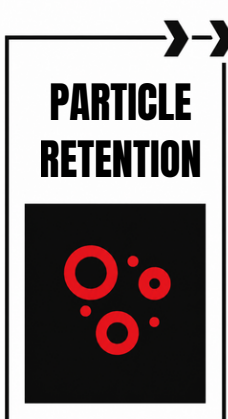

Efficiency	BETA 4>4193 (ISO 16889:99) THETA 4>4310 (SINGLE PASS)
DHC	140 GRAMS (MTD)
Recommended flow	25 GPM (TRANSFER)
Max. Flow	50 GPM (RECIRCULATION)
Max. Pressure	100 PSI
Housing	BOWL FMS-25-BW

FMS-W25-ASCB

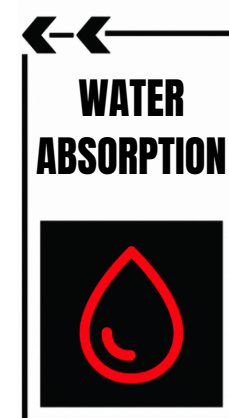

Efficiency	95%
WHC	1000 ML
Recommended flow	25 GPM (TRANSFER)
Max. Flow	40 GPM (RECIRCULATION)
Max. Pressure	100 PSI
Housing	BOWL FMS-25-BW

Controlling particulate contamination is essential for protecting fuels and industrial fluids. Our filter elements offer reliable protection for diesel fuels, lubricating oils, and hydraulic systems, helping to maintain cleaner, safer, and more efficient operations.



Water and emulsions negatively impact the performance of fuels and oils, causing corrosion, oxidation, and reduced performance. Our absorbent materials help keep fluids moisture-free, protecting hydraulic equipment, lubrication systems, and critical diesel applications.



SCAN TO VISIT OUR WEBSITE



FMS INTERNATIONAL INC.

580 W PARK RD LEETSDALE
PA 15056
USA

+1724 340 4210
info@fms-filtration.com
fms-filtration.com



FMS-1/25-PSCB
FUEL FILTER




SUSTAINABLE HIGH-PERFORMANCE FILTRATION


FILTER MORE, WASTE LESS.




99.9%
FILTRATION
EFFICIENCY
(ISO 16889)



>90%
LESS
METAL WASTE
METALS



>80%
REDUCE OIL
WASTE




>80%
LOWER CO2
EMISSIONS

*Compared to the previous generation with -0%.


TECHNICAL SPECIFICATIONS OF THE ELEMENT

FMS-1/25-PSCB

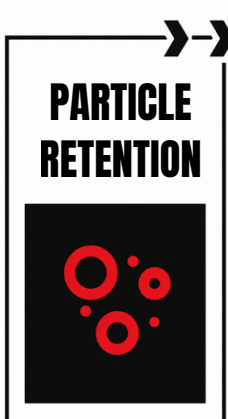

Efficiency	BETA 4>4193 (ISO 16889:99)
	THETA 4>4310 (SINGLE PASS)
DHC	140 GRAMS (MTD)
Recommended flow	25 GPM
Max. Pressure	100 PSI
Housing	BOWL FMS-25-BW

FILTER SATURATION CURVE DELTA P VS INJECTED MASS RELATIONSHIP

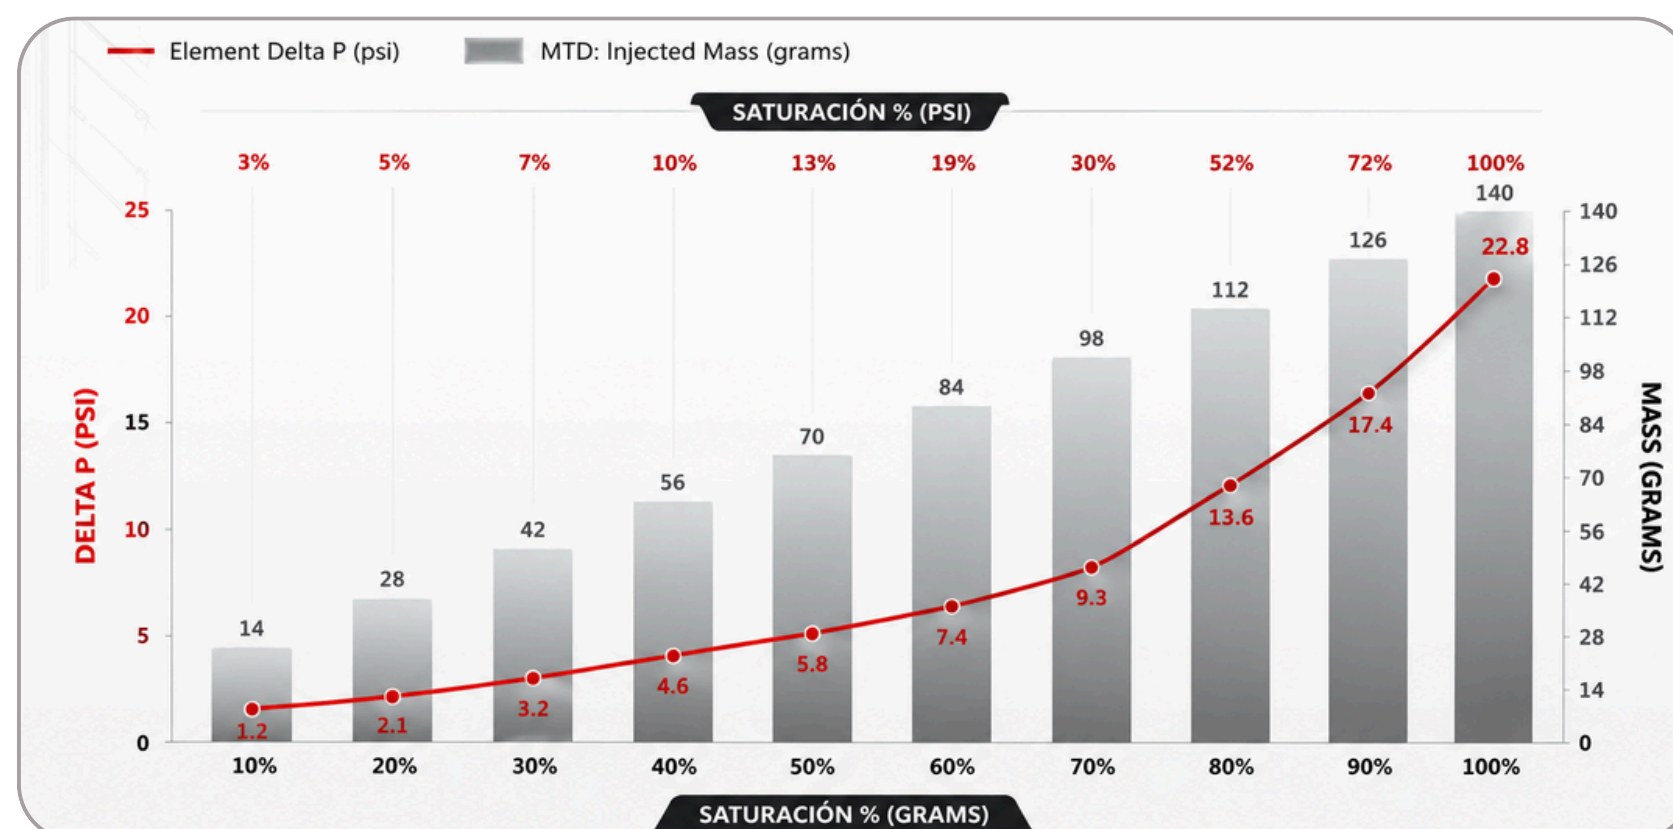

Controlling particulate contamination is essential for protecting fuels and industrial fluids. Our filter elements offer reliable protection for diesel fuels, lubricating oils, and hydraulic systems, helping to maintain cleaner, safer, and more efficient operations.

DOBLEMENTE
VERDES



SCAN TO VISIT OUR WEBSITE



FMS INTERNATIONAL INC.

580 W PARK RD LEETSDALE
PA 15056
USA

+1724 340 4210
info@fms-filtration.com
fms-filtration.com



FMS-W25-ASCB
WATER ABSORBENT FILTER




SUSTAINABLE HIGH- FILTRATION PERFORMANCE


FILTER MORE, WASTE LESS.



95 %
FILTRATION
EFFICIENCY



>80%
REDUCE OIL
WASTE



>80%
LOWER CO2
EMISSIONS

*Compared to the previous generation with -0%.


TECHNICAL SPECIFICATIONS OF THE ELEMENT

FMS-W25-ASCB

Efficiency	95%
WHC	1000 ML
Recommended flow	25 GPM
Maximum pressure	100 PSI
Housing	BOWL FMS-25-BW



WATER SATURATION CURVE DELTA P VS INJECTED WATER RELATIONSHIP

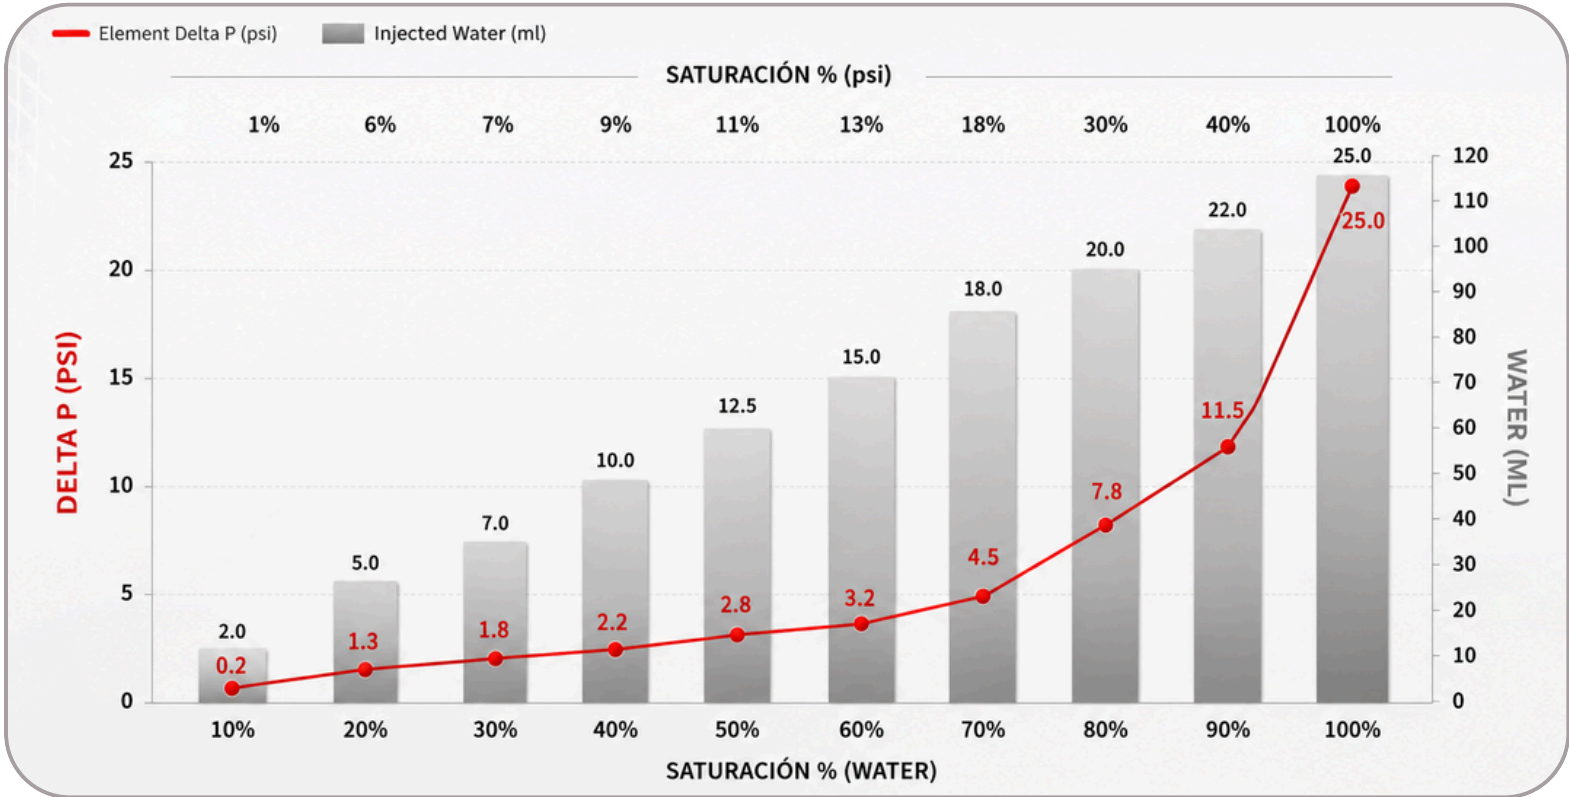

Water and emulsions negatively impact the performance of fuels and oils, causing corrosion, oxidation, and reduced performance. Our absorbent materials help keep fluids moisture-free, protecting hydraulic equipment, lubrication systems, and critical diesel applications.

DOBLEMENTE
VERDES



SCAN TO VISIT OUR WEBSITE



FMS INTERNATIONAL INC.

580 W PARK RD LEETSDALE
PA 15056
USA

+1724 340 4210
info@fms-filtration.com
fms-filtration.com